


# Grupo 503 "RS" - Anel para Eixo - DIN 6799

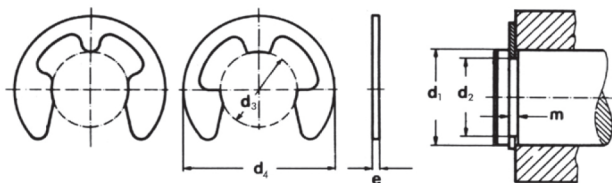

$d_3 = \emptyset$  do anel não tensionado.

Os anéis deste grupo são produzidos numa das formas acima.

Código Fixoved	$d_1$	ANEL				Peso KG/1000	RANHURA		
		$d_3$		$e$	$d_4$ máx.		$d_2$	Tol.	$m$
503.012	1,2	1,4	2,0	0,3	2,90	0,009	1,2	0	0,34
503.015	1,5	2,0	2,5	0,4	3,90	0,021	1,5	-0,06	0,44
503.019	1,9	2,5	3,0	0,5	4,40	0,040	1,9		0,54
503.023	2,3	3,0	4,0	0,6	5,90	0,069	2,3		0,64
503.032	3,2	4,0	5,0	0,6	6,90	0,088	3,2		0,64
503.040	4,0	5,0	7,0	0,7	8,85	0,158	4,0	0	0,74
503.050	5,0	6,0	8,0	0,7	10,85	0,236	5,0	-0,075	0,74
503.060	6,0	7,0	9,0	0,7	11,80	0,255	6,0		0,74
503.070	7,0	8,0	11,0	0,9	13,80	0,474	7,0	0	0,94
503.080	8,0	9,0	12,0	1,0	15,75	0,660	8,0	-0,09	1,05
503.090	9,0	10,0	14,0	1,1	18,20	1,000	9,0	0	1,15
503.100	10,0	11,0	15,0	1,2	19,70	1,120	10,0	-0,11	1,25
503.120	12,0	13,0	18,0	1,3	22,70	1,770	12,0		1,35
503.150	15,0	16,0	24,0	1,5	28,70	3,370	15,0	0	1,55
503.190	19,0	20,0	31,0	1,75	36,70	6,420	19,0	-0,13	1,80

**Material:** Aço Mola C60, C67 ou C75 conf. DIN 17.222

**Dureza:** 46 a 54 HRC

Espessura - e	Tolerância
de 0,25 à 0,9	$\pm 0,02$
de 1,0 à 1,75	$\pm 0,03$