

Parafusos

Parafuso Allen Cabeça Cilindrica - DIN912

Grupo: 912



d1		M3	M4	M5	M6	M8	M10	M12	M14	M16
Passo		0,50	0,70	0,80	1,00	1,25	1,50	1,75	2,00	2,00
D	máx.	5,68	7,22	8,72	10,22	13,27	16,27	18,27	21,33	24,33
	mín.	5,32	6,78	8,28	9,78	12,73	15,73	17,73	20,67	23,67
h	máx.	3,00	4,00	5,00	6,00	8,00	10,00	12,00	14,00	16,00
	mín.	2,86	3,82	4,84	5,80	7,64	9,64	11,57	13,57	15,57
s	máx.	2,58	3,08	4,07	5,08	6,14	8,17	10,17	12,21	14,21
	mín.	2,52	3,02	4,02	5,02	6,02	8,02	10,02	12,03	14,03
b	mín.	18,00	20,00	22,00	24,00	28,00	32,00	36,00	40,00	44,00



Comprimento Nominal - L	Tol.	Medidas Preferenciais (*)								
6,00	±0,24	*	*	*						
8,00	±0,29	*	*	*	*					
10,00	±0,29	*	*	*	*	*				
12,00	±0,35	*	*	*	*	*	*			
16,00	±0,35	*	*	*	*	*	*	*		
20,00	±0,42	*	*	*	*	*	*	*	*	
25,00	±0,42	*	*	*	*	*	*	*	*	*
30,00	±0,42	*	*	*	*	*	*	*	*	*
35,00	±0,50		*	*	*	*	*	*	*	*
40,00	±0,50		*	*	*	*	*	*	*	*
45,00	±0,50		*	*	*	*	*	*	*	*
50,00	±0,50		*	*	*	*	*	*	*	*
55,00	±0,60			*	*	*	*	*	*	*
60,00	±0,60			*	*	*	*	*	*	*
65,00	±0,60			*	*	*	*	*	*	*
70,00	±0,60			*	*	*	*	*	*	*
80,00	±0,60			*	*	*	*	*	*	*
90,00	±0,70			*	*	*	*	*	*	*
100,00	±0,70				*	*	*	*	*	*
110,00	±0,70				*	*	*	*	*	*
120,00	±0,70				*	*	*	*	*	
130,00	±0,80					*	*	*	*	
140,00	±0,80					*	*	*	*	
150,00	±0,80					*	*	*	*	
160,00	±0,80					*	*	*	*	
170,00	±0,80						*	*	*	
180,00	±0,80						*	*	*	
190,00	±0,90						*	*	*	
200,00	±0,90						*	*	*	


Material/Classe: Aço carbono, Aço inoxidável ou sob consulta.

Acesse nosso site



Parafuso Sextavado Rosca Parcial - DIN931

Grupo: 931

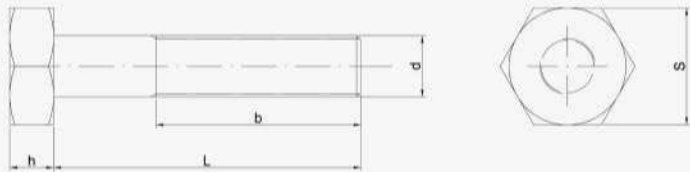

d		M6	M8	M10	M12	M14	M16	M18
Passo		1,00	1,25	1,50	1,75	2,00	2,00	2,50
s	máx.	10,00	13,00	17,00	19,00	22,00	24,00	27,00
	mín.	9,78	12,73	16,73	18,67	21,67	23,67	26,67
h	máx.	4,15	5,45	6,58	7,68	8,98	10,18	11,72
	mín.	3,85	5,15	6,22	7,32	8,62	9,82	11,28
b min.	L ≤ 125	18,00	22,00	26,00	30,00	34,00	38,00	42,00
	125 < L ≤ 200	24,00	28,00	32,00	32,00	40,00	44,00	48,00

Comprimento Nominal - L	Tol.	Medidas Preferenciais (*)						
40,00	±0,50	+	*	*	*			
45,00	±0,50	+	*	*	*	*		
50,00	±0,50	+	*	*	*	*	*	*
55,00	±0,60	*	*	*	*	*	*	*
60,00	±0,60	+	*	*	*	*	*	*
65,00	±0,60	+	*	*	*	*	*	*
70,00	±0,60	+	*	*	*	*	*	*
80,00	±0,60	+	*	*	*	*	*	*
90,00	±0,70	+	*	*	*	*	*	*
100,00	±0,70	+	*	*	*	*	*	*
110,00	±0,70	+	*	*	*	*	*	*
120,00	±0,70	+	*	*	*	*	*	*
130,00	±0,80		*	*	*	*	*	*
140,00	±0,80		*	*	*	*	*	*
150,00	±0,80		*	*	*	*	*	*
160,00	±0,80			+	*		*	*
170,00	±0,80			+	*		*	*
180,00	±0,80			*	*		*	*
190,00	±0,90			*	*		*	*
200,00	±0,90			*	*		*	*


Material/Classe: Aço carbono, 5.8, 8.8, 10.9, 12.9, Aço inoxidável, Nylon ou sob consulta.

Parafuso Sextavado Rosca Total - DIN933

Grupo: 933



d		M5	M6	M8	M10	M12	M14	M16
Passo		0,80	1,00	1,25	1,50	1,75	2,00	2,00
s	máx.	8,00	10,00	13,00	17,00	19,00	22,00	24,00
	mín.	7,78	9,78	12,73	16,73	18,67	21,67	23,67
h	máx.	3,65	4,15	5,45	6,58	7,68	8,98	10,18
	mín.	3,35	3,85	5,15	6,22	7,32	8,62	9,82



Comprimento Nominal - L	Tol.	Medidas Preferenciais (*)						
10,00	±0,29	*	*	*				*
12,00	±0,35	*	*	*				*
16,00	±0,35	*	*	*	*			*
20,00	±0,42	*	*	*	*	*		*
25,00	±0,42	*	*	*	*	*	*	*
30,00	±0,42	*	*	*	*	*	*	*
35,00	±0,50	*	*	*	*	*	*	*
40,00	±0,50	*	*	*	*	*	*	*
45,00	±0,50	*	*	*	*	*	*	*
50,00	±0,50	*	*	*	*	*	*	*
55,00	±0,60	*	*	*	*	*	*	*
60,00	±0,60	*	*	*	*	*	*	*
65,00	±0,60	*	*	*	*	*	*	*
70,00	±0,60	*	*	*	*	*	*	*
80,00	±0,60		*	*	*	*	*	*
90,00	±0,70		*	*	*	*	*	*
100,00	±0,70		*	*	*	*	*	*
110,00	±0,70			*	*	*		*
120,00	±0,70			*	*	*		*
130,00	±0,80			*	*	*		*
140,00	±0,80			*	*	*		*
150,00	±0,80			*	*	*		*
160,00	±0,80							*
170,00	±0,80							*
180,00	±0,80							*
190,00	±0,90							*
200,00	±0,90							*

Material/Classe: Aço carbono, 5.8, 8.8, 10.9, 12.9, Aço inoxidável, Nylon ou sob consulta.

Acesse nosso site

